

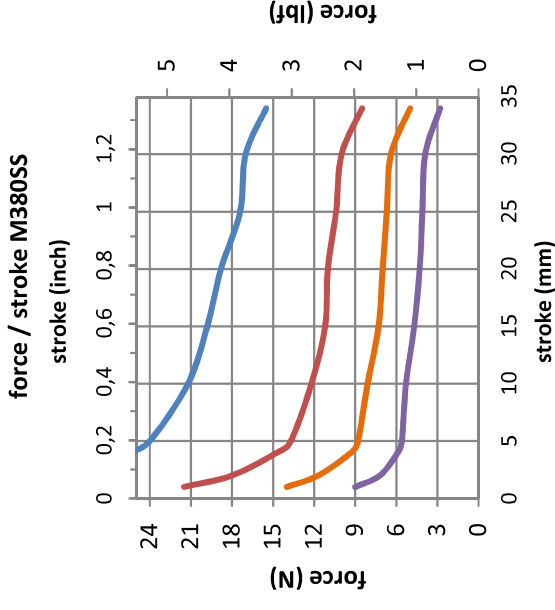


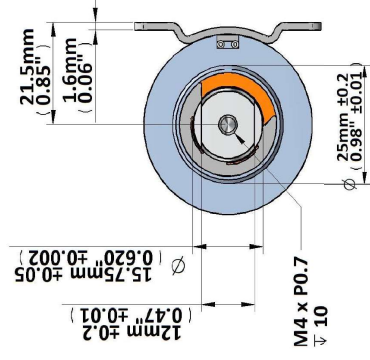

GEEPLUS Super Stroke Solenoid M380SS-XXv

Device drawn in energised condition
Life Expectancy >2M cycles
Leadwires UL1430, 22AWG
Plunger Mass 91 grammes
Mass 535 grammes

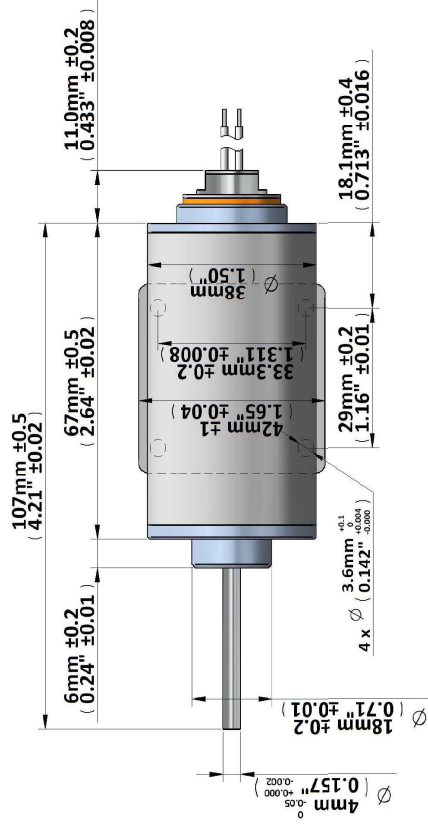

Data at 20°C, device performance measured without heat sink

duty cycle = "on" time "on" time + "off" time x 100%	100% cont.	50% or less	25% or less	10% or less	volts DC	
					number of turns	
Max. "on" time in seconds	∞	330	80	20		
watts at 20°C	10	20	40	100		
ampere-turns at 20°	1360	1923	2720	4300		
AWG no.	resistance Ω±10% (at 20°C)		number of turns			
M380SS-12v	15		1712			
M380SS-24v	58		3322			
M380SS-48v	224		6360			
M380SS-96v	871		12400			

Insulation Resistance >100MΩ, 500VDC Megger

Class E (120°C) insulation class

Dielectric Strength 1000VAC, 50/60Hz, 1 minute

Geeplus reserves the right to change specifications without notice
www.geeplus.com