

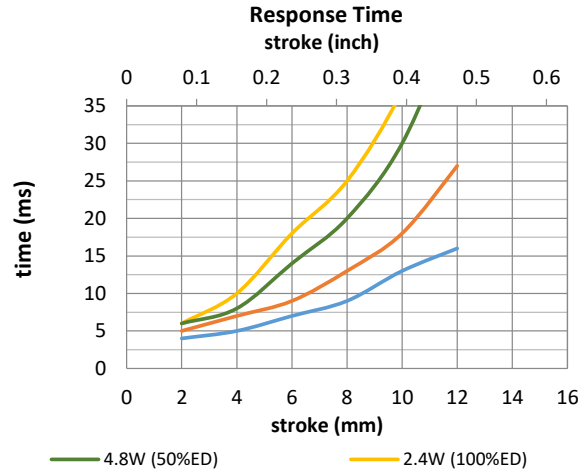
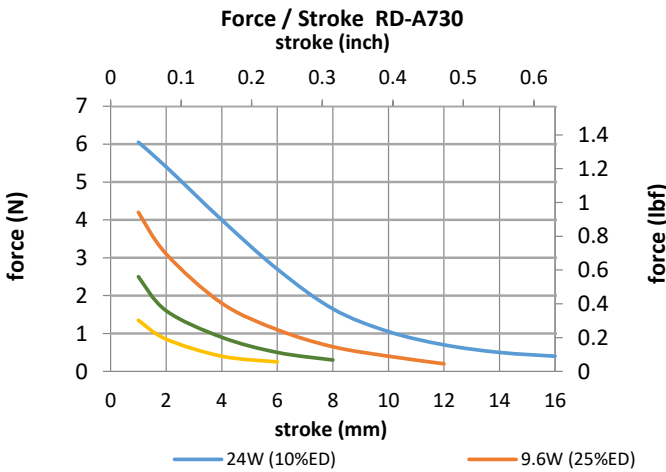
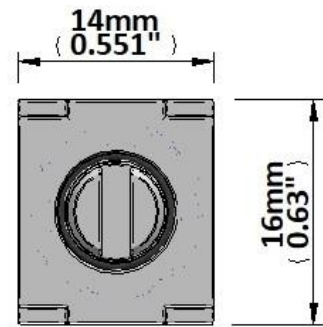
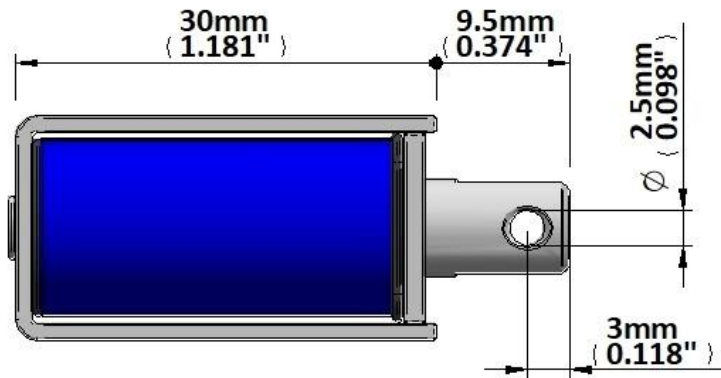


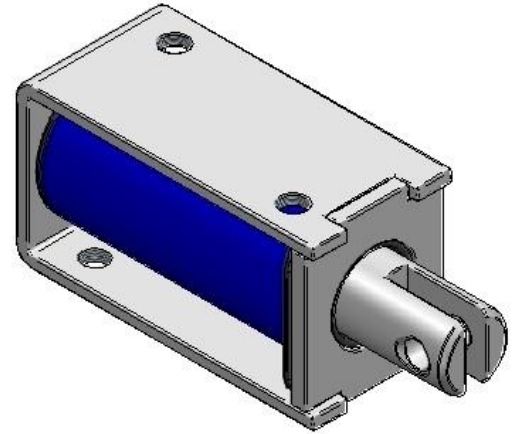

Device drawn in energised condition
 Life Expectancy >250K cycles
 Leadwires UL1007, 26AWG, 300mm

Plunger Mass 9 grammes
 Total Mass 32 grammes

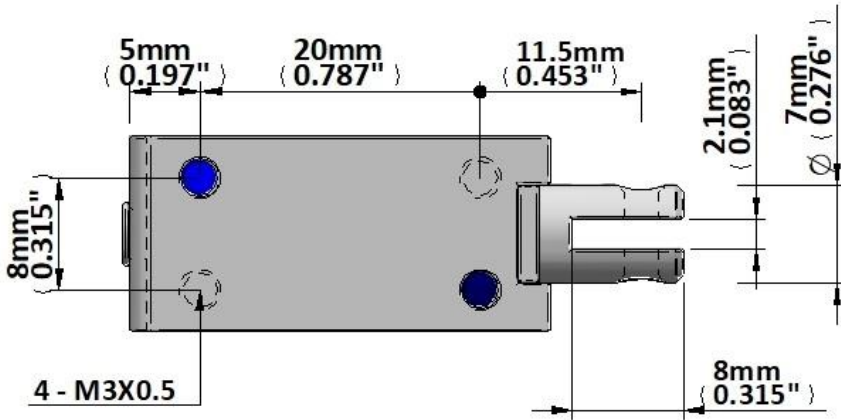

Data at 20°C, device performance measured without heat sink

duty cycle = $\frac{\text{"on" time}}{\text{"on" time} + \text{"off" time}} \times 100\%$		100% cont.	50% or less	25% or less	10% or less
Max. "on" time in seconds		∞	264	85	19
watts at 20°C		2.2	4.4	8.8	22.0
ampere-turns at 20°					
AWG no.	resistance	number of turns	volts DC		
	$\Omega \pm 10\%$ (at 20°C)				
RD-A730-6v	16	6.0	8.5	12.0	19.0
RD-A730-12v	66	12.0	17.0	24.0	38.0
RD-A730-24v	262	24.0	34.0	48.0	76.0

Insulation Resistance >100MΩ, 500VDC Megger

Dielectric Strength 500VAC, 50/60Hz, 1 minute

Class A (105°C) insulation class